Return To Home

Operation and Care Manual

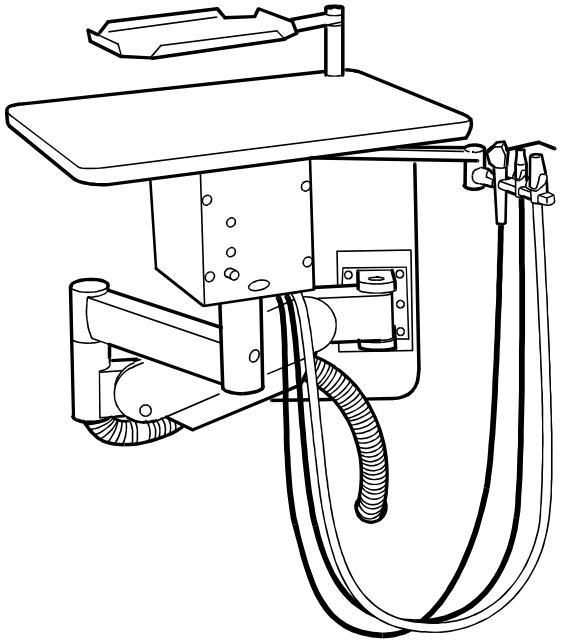

Assistant's Wall/Cabinet Mounted Unit

CONTENTS

Label Definitions 1
Controls 2
Cleaning and Maintenance 3
Warranty 4
Technical Information 5

TPW1497 Rev. D

Return To Table Of Contents

Label Definitions

Hazards which result in severe personal injury or death.

Hazards which could result in personal injury.

Hazards which could result in equipment or property damage.

Alert user to pertinent facts and conditions.

"DANGER
- EXPLOSION HAZARD -
DO NOT USE THIS EQUIPMENT
IN THE PRESENCE OF
FLAMMABLE ANESTHETICS"

RATING FOR 120 VOLT UNIT

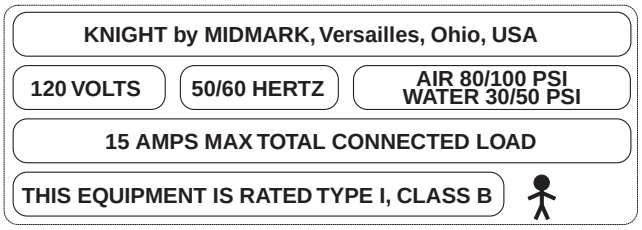
KNIGHT by MIDMARK, Versailles, Ohio, USA
120 VOLTS
50/60 HERTZ
AIR 80/100 PSI
WATER 30/50 PSI
15 AMPS MAX TOTAL CONNECTED LOAD
THIS EQUIPMENT IS RATED TYPE I, CLASS B

RATING FOR 240 VOLT UNIT

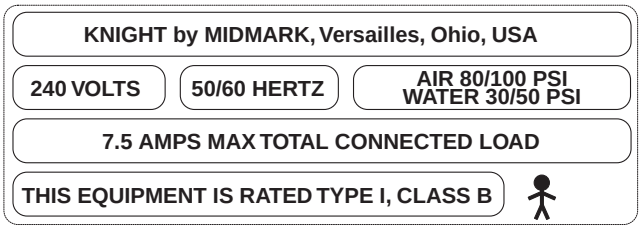
KNIGHT by MIDMARK, Versailles, Ohio, USA
240 VOLTS
50/60 HERTZ
AIR 80/100 PSI
WATER 30/50 PSI
7.5 AMPS MAX TOTAL CONNECTED LOAD
THIS EQUIPMENT IS RATED TYPE I, CLASS B

CONFORMS TO
UL STD. 2601-1
CERTIFIED TO
CAN/CSA - C22.2
NO. 601.1

CE

Controls

The Assistant's Wall/Cabinet Mounted unit is designed for simple and convenient operation.

FIXED ARM MOVEMENT ~

The fixed arm moves horizontally and is pre-adjusted at the factory to move smoothly, providing slight resistance.

FLEX ARM MOVEMENT ~

The flex arm travels up and down and moves horizontally also. It has been pre-set at the factory and it is designed to support the weight of the unit without downward drift.

AIR BRAKE ~

The air brake control button is located on the front panel of the unit. By pushing this button and holding it down, the air brake will be released and the unit can be positioned as desired.
The air brake is designed to support up to 40 pounds of additional load on the work surface. If the unit is overloaded the air brake is designed to slip without damaging the mechanism.

WATER OUTLET AND FLOW CONTROL ~

These controls are located on the front panel of the unit and provide an auxiliary water supply.

ASSISTANT'S INSTRUMENTATION

A saliva ejector, HVE and syringe are standard instrumentation on the unit. They are positioned on a swing arm holder located under the work surface.

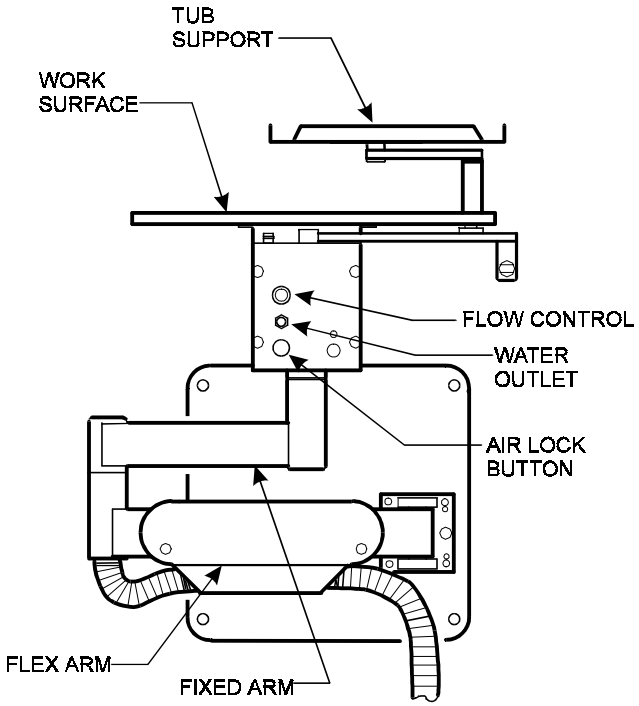

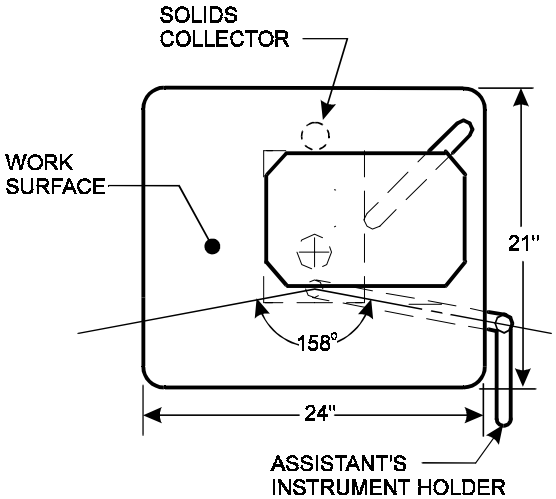

Cleaning and Maintenance

Knight Mfg. strongly recommends barrier protection as the most effective and safest way to control cross contamination. Some disinfections may cause costly damage to the equipment. If disinfectants are to be used, we recommend the products listed below. Follow manufacturers directions carefully.

CLEANING THE UNIT SURFACES

Surfaces should be wiped regularly with a soft cloth. The equipment should be washed occasionally with soap and water.

CAUTION: Avoid using agents containing Phenol water and/or phenol alcohol. These may cause damage to plastic surfaces.

The following disinfectant/ cleaner products have been tested and are recommended for us on plastic and painted surfaces.

Cavicide
distributed by E&D Dental Products Inc., Westfield, NJ

Precise - Hospital Foam Cleaner Disinfectant
manufactured by Caltech Industries, Inc., Midland, MI

CAUTION: Failure to follow manufacturer directions may damage surfaces.

CLEANING HANDPIECE, SYRINGE AND VACUUM HOSES

The hoses can be washed with soap and water.

MAINTAINING THE VACUUM SYSTEM

Use only a cleanser specifically formulated for dental vacuum systems and follow manufacturer directions carefully.

CAUTION: Failure to follow manufacturer directions may damage your vacuum system.

CLEANING THE SOLIDS COLLECTOR

Turn off the vacuum supply. Lift up the cap on top of the solids collector to expose the basket strainer. Empty the basket strainer and scrub it with a brush. To help simplify the basket removal, wet the inside of the solids collector with the syringe after removing the cover. The water will soften the amalgam for easier removal of the basket. When clean, return the basket to the collector and replace the cap. The solids collector should be cleaned daily to avoid loss of suction. Replacement basket strainer can be ordered under Knight Part Number 151894.

SERVICING THE AIR AND WATER FILTERS

To insure proper air and water flow, the internal air and water filters should be serviced every three months (More or less frequently depending on water quality). This work should be performed by a qualified service technician. Please contact your authorized Knight dealer for more information.

CLEANING AND MAINTENANCE SCHEDULE

	as necessary	daily	other
Unit surfaces	√		
Hoses	√		
Vacuum system	√		
Solids collector		√	
Air & water filters			3 month service

Warranty

WARRANTY

Knight by Midmark products are warranted against defect in material and workmanship for a period of 2 years, unless otherwise indicated in writing, from the time of delivery.

Exceptions:

1) "KINK-VALVE" module carries a 10 year warranty.
2) The original light bulb on a new light carries a 1 year warranty.
3) Accessories not manufactured by Knight are excluded (i.e. Fiber optic systems, Scalers, Electric micromotor systems, Curing light systems, X-ray viewers, etc.)
4) Replacement parts and accessories carry a 90 day warranty.

Knight's sole obligation under the warranty is either to provide parts for the repair or to provide the replacement product (excluding labor and shipping). The buyer shall have no other remedy. All special, incidental and coincidental damage is excluded. Written notice of breach of warranty must be given to Knight within the warranty period.

The warranty does not cover damage resulting from improper installation or maintenance, accident or misuse. The warranty does not cover damage resulting from the use of cleaning, disinfecting or sterilization chemicals and processes.

No other warranties as to merchantability, fitness for use or otherwise are made.

Technical Information

Circuit diagrams, parts lists, technical descriptions, etc. will be provided upon request.

Return To Table Of Contents

Knight®
by Midmark

Midmark Corporation • P O Box 286 • 60 Vista Drive
Versailles • Ohio • 45380-0286 • www.midmark.com
Phone: 937-526-3662 Fax: 937-526-5542